


AUPS126 SERIES SELF-PRIMING PERIPHERAL PUMPS



AUPS series automatic self-prime water pumps are suitable for pumping clean water. Consisted of a water pump, a tank and a pressure switch, this series is relatively simple construction, no expensive but reliable and safety. It is suitable to grant the correct pressure to modern domestic and industrial water systems.

WORKING CONDITIONS

Max Temperature of Fluid up to +80℃
 Max Pressure 10bar,
 Max Ambient Temperature up to 40℃

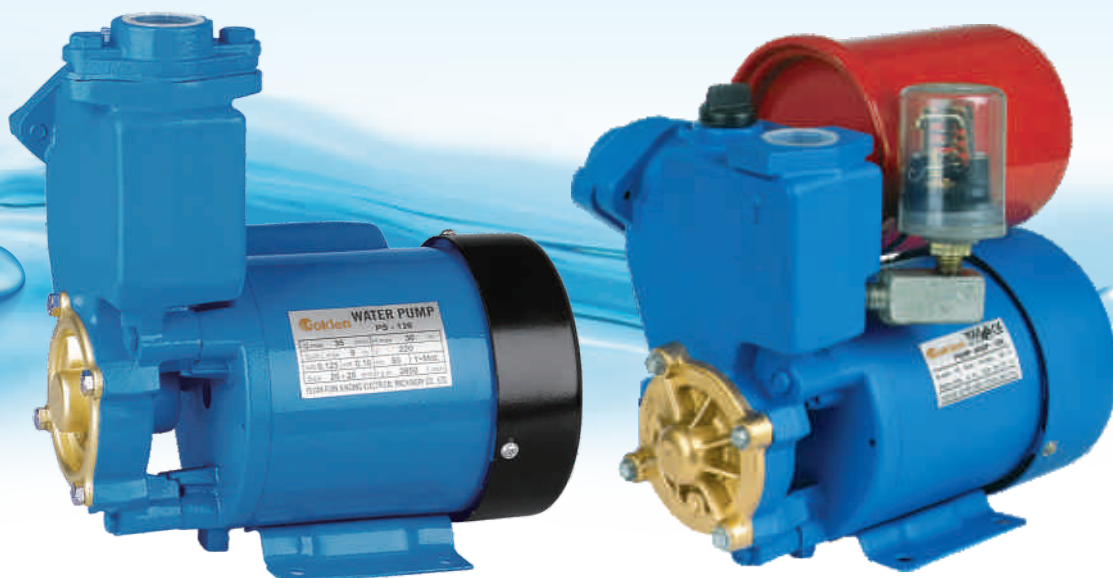

AUPS126

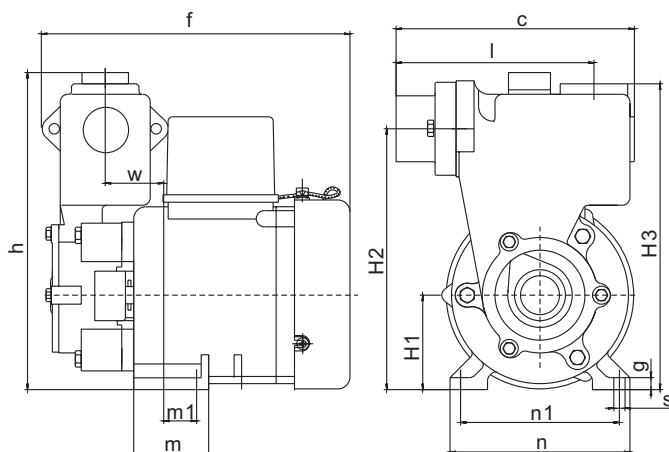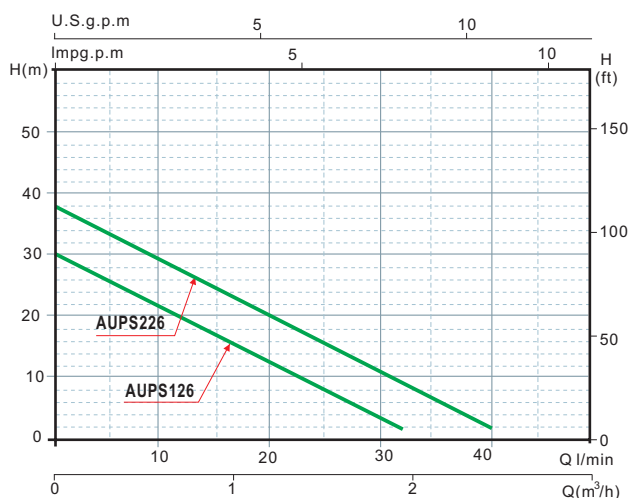

DIMENSIONS

TYPE	Dimensions mm																Weight (kg)		Packing Size (mm)			Packing QTY
	a	f	h	c	H1	H2	H3	m1	m	n	n1	l	w	w1	g	s	NW	GW	L	W	H	
PS126	46	258	249	208	71	211	181	60	80	-	95	129	-	59	-	10	7.7	8.5	310	230	285	1750
AUPS126	46	258	249	208	71	211	181	60	80	-	95	129	-	59	-	10	7.7	8.5	310	230	285	1750

TECHNICAL DATA

TYPE	Power		Current (A)	Capacitor (μF)	H.max (m)	Q.max (l/min)	Size (inch)	S.Head (m)	Total head (m)	Capacity l/min							
	KW	HP								5	10	15	20	25	30	35	40
PS126	0.37	0.5	1.4	8	32	35	1"x 1"	9		32	26	21	16	11	6	1	
AUPS126	0.37	0.5	1.4	8	32	35	1"x 1"	9		32	26	21	16	11	6	1	

Standard data and equipment: single phase 220V/50Hz, Brass impeller, carbon steel motor shaft, with motor protector inside.

Others model and material such as three phase, 110V, 60Hz, dual voltage, stainless steel shaft, etc, will be available upon request.