

JET-P SERIES SELF-PRIMING JET PUMPS



JET-P series are suitable for pumping clean water. They are particularly suitable for domestic applications such as supply water from well, pool etc, the automatic distribution of water by surge tanks and pressure switch, gardening, and increasing of water pressure.

WORKING CONDITIONS

Max Temperature of Fluid up to +80℃
Max Pressure 10bar,
Max Ambient Temperature up to 40℃



JET-P

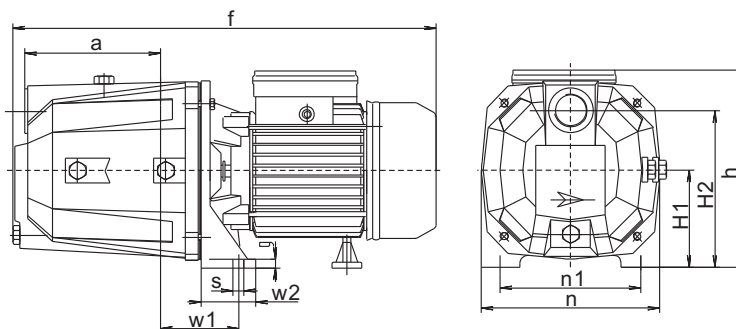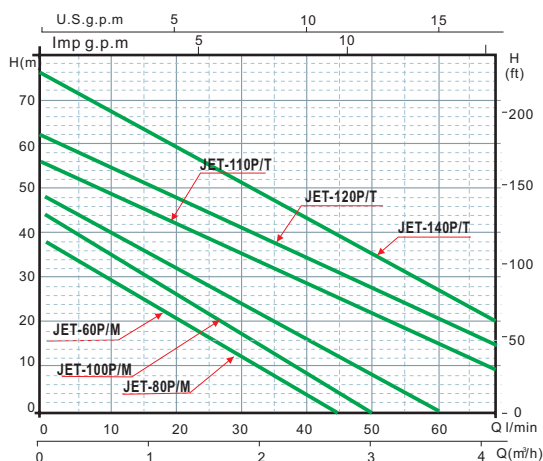

DIMENSIONS

TYPE	Dimensions mm											Weight (kg)		Packing Size (mm)			Packing QTY
	a	f	h	H1	H2	w1	w2	n	n1	g	s	NW	GW	L	W	H	20'Cont
JET-60P	138	428	200	98	158	79	55	182	142	9	11	12.7	13.5	480	210	220	1340
JET-80P	138	428	200	98	158	79	55	182	142	9	11	13.6	14.4	480	210	220	1340
JET-100P	138	428	200	98	158	79	55	182	142	9	11	14.4	15.2	480	210	220	1340
JET-110P/T	138	428	200	98	158	79	55	182	142	9	11	15.2	16	480	210	220	1340
JET-120P/T	100	550	258	120	200	170	50	235	200	12	12	34	36	580	255	330	400
JET-140P/T	100	550	258	120	200	170	50	235	200	12	12	36	38	580	255	330	400

TECHNICAL DATA

TYPE	Power		Ampere		R.P.M	Q.max (l/min)	H.max (m)	S.Head (m)
	HP	KW	1~220V	3~380V				
JET-60P	0.5	0.37	3	-	2850	45	38	9
JET-80P	0.75	0.55	3.6	-	2850	50	45	9
JET-100P	1	0.75	4.8	-	2850	60	48	9
JET-110P/T	1.5	1.1	7.5	2.7	2850	80	56	9
JET-120P/T	2	1.5	9.6	3.5	2850	90	62	9
JET-140P/T	3	2.2	13.5	5.0	2850	100	75	9

Standard data and equipment: single phase 220V/50Hz, Brass impeller, carbon steel motor shaft, with motor protector inside.
Others model and material such as three phase, 110V, 60Hz, dual voltage, stainless steel shaft, etc, will be available upon request.