

JETDP SELF-PRIMING DEEP WELL PUMPS


Siminal like JDW Series DP series are suitable for pumping clean water. They are particularly suitable for domestic applications such as supply water from deep well, pool etc, the automatic distribution of water by surge tanks and pressure switch, gardening, and increasing of water pressure.

WORKING CONDITIONS

Max Temperature of Fluid up to +80℃
Max Pressure 10bar,
Max Ambient Temperature up to 40℃



JETDP

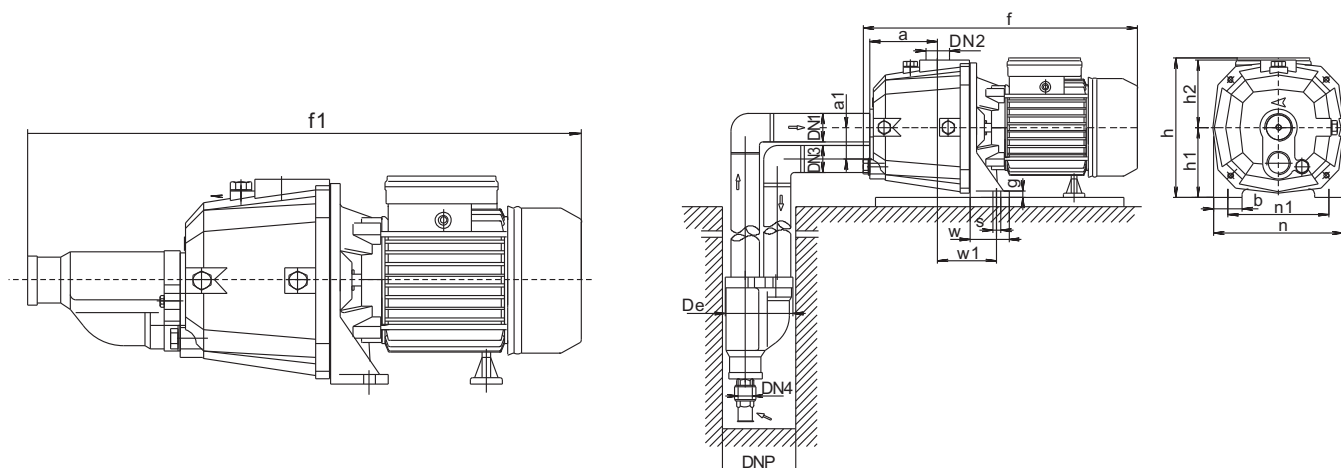

DIMENSIONS

TYPE	Dimensions mm																			Weight (kg)		PackingSize (mm)			Packing QTY.
	DNP	DN1	DN2	DN3	De	a	al	f	f1	h	h1	h2	n	n1	w	w1	b	g	s	NW	GW	L	W	H	20'Cont
DP255A	4"	1.25"	1"	1"	96	95	43	387	520	196	98	95	182	142	55	84	40	9	11	14.8	15.8	420	300	230	850
DP370A	4"	1.25"	1"	1"	96	95	43	387	520	196	98	95	182	142	55	84	40	9	11	15.3	16.4	420	300	230	850
DP550A	4"	1.25"	1"	1"	96	95	43	387	520	196	98	95	182	142	55	84	40	9	11	16.3	17.4	420	300	230	850
DP750A	4"	1.25"	1"	1"	96	95	43	387	520	196	98	95	182	142	55	84	40	9	11	17.3	18.4	420	300	230	850

TECHNICAL DATA

TYPE	Power		Current (A)	Size DN1XDN2XDN3	Capacitor (μF)	Total Head (m)	Injector Type	Sect. H (m)	Capacity l/min At discharge head m			
	KW	HP							10m	15m	25m	35m
DP255A	0.25	0.33	2.1	1.25"X1"X1"	12	40	E20	10	50	34	12	8
							E20	15	34	20	5	5
							E30	20	17	13	7	4
DP370A	0.37	0.5	2.4	1.25"X1"X1"	16	50	E20	10		42	18	15
							E20	15		25	16	10
							E30	20		20	10	7
DP550A	0.55	0.75	3.5	1.25"X1"X1"	16	55	E20	15		38	24	28
							E30	20		30	17	15
							E30	30		21	12	10
DP750A	0.75	1	4.6	1.25"X1"X1"	20	55	E20	15		50	43	
							E30	20		40	30	
							E30	30		31	25	

Standard data and equipment: single phase 220V/50Hz, Brass impeller, carbon steel motor shaft, with motor protector inside.
Others model and material such as three phase, 110V, 60Hz, dual voltage, stainless steel shaft, etc, will be available upon request.